

GENERAL CATALOG
vol. 40 - 41



KAWASAKI
Professional AIR Tools
MADE IN JAPAN

PAGE 2 • 3	1/2" IMPACT WRENCHES
PAGE 4	3/4" IMPACT WRENCHES
PAGE 5	3/8" & 1" IMPACT WRENCHES
PAGE 6	1" & 1-1/2" IMPACT WRENCHES
PAGE 7	RATCHET WRENCHES
PAGE 8	DRILLS & DRILL CHUCKS
PAGE 9	SCREW & IMPACT DRIVERS
PAGE 10	DIE GRINDERS
PAGE 11	HEAVY DUTY DIE GRINDERS
PAGE 12	HEAVY DUTY DISC GRINDERS -STRAIGHT-
PAGE 13	DISC GRINDERS -ANGLE HEAD-
PAGE 14	DOUBLE ACTION (D/A) SANDERS
PAGE 15	ORBITAL SANDERS
PAGE 16	SANDERS / POLISHERS
PAGE 17	SAWS, RIVETERS & HAMMERS
PAGE 18	FLUX CHIPPERS / NEEDLE SCALERS & SAND RAMMERS
PAGE 19	CHIPPING HAMMERS & CONCRETE BREAKERS
PAGE 20	QUICK CHANGE COUPLINGS
PAGE 21	IMPACT WRENCH HEXAGON SOCKETS & MINI OILER

• All specifications are under air 6.3 Bar
• The types and specifications may be changed with or without notice.

CONVERSION FACTORS

LENGTH:

1 inch = 25.40 mm
1 mm = 0.04 inch

WEIGHT:

1 kg = 2.2 lb
1 lb = 0.453 kg

TORQUE:

1 Nm = 0.74 ft/lbs
1 ft/lbs = 1.35 Nm

HOW TO SEE DIMENSIONS

Drill

(L) (W) (H)
225 x 151 x 135 mm

KPT-1651

Chuck Capacity	13 mm
Spindle Size	3/8"- 24 THD.
Free Speed	550 rpm
Air Consumption	11.12 l/s
Dimensions	225 x 151 x 135 mm
Net Weight	1.58 kg
Air Inlet	1/4"

KAWASAKI
Professional AIR tools



Long History

Kawasaki Machinery Co., Ltd. founded in 1969 as an overseas department of Kawasaki Industrial Co., Ltd., is one of the main suppliers for Japanese automotive industry. And, our brand "KPT/Kawasaki" Pneumatic Tools has been well accepted and gotten good reputation in more than 100 countries.



"MADE IN JAPAN" QUALITY

All our tools are made in Japan using quality materials by skilled workers under strict quality control system. Most of models are CE certified. We're keeping continuous improvement as "KAIZEN" system in order to keep the high quality & competitive price.



Wide Range

We have more than 200 kinds of models in the tool range to meet every requirement of customers in various industries, not only automotive after-market, but also construction, manufacturing, wood working & etc...



Prompt Delivery & After-service

Almost all of the models are in stock in our warehouse near the Tokyo port for prompt delivery. We provide spare parts (repair) through your local agent/distributor for after-service.

⚠ For Your Safety



1. Read safety instructions before operating any pneumatic tools. Inspect the tool carefully and make sure you are completely familiar with all controlling aspects of the tool.



2. Wear safety glasses and hearing protection.



3. Dust mask and gloves are recommended.



4. Wear suitable clothes and safety shoes. Keep loose clothing, neckties, long hair and jewelry away from the tool.



• Before each use of the tool, check the air hoses and the connections from damage.



• Disconnect the tool from the air supply when replacing any accessories and changing tools.




• Secure the work piece with suitable clamping or holding devices.

• Keep other person away from the working area.

• Allow repairs to be performed only by a qualified technician.

• Vibration, repetitive motions or uncomfortable positions may be harmful to your body.

Air supply & General notes



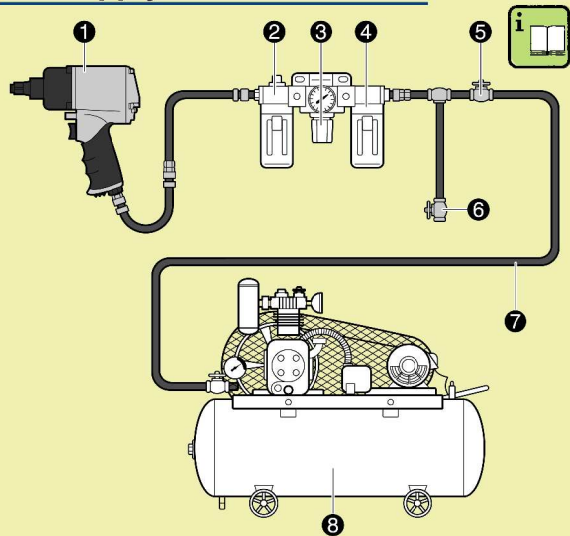


Read the operating instructions of the pneumatic tool.

- Before use, place a few drops of oil in the air inlet of the pneumatic tool.
- When under load, The pneumatic tool ❶ requires an air pressure of approx. 6.3bar (630kPa).
- Clean the air filter ❹ from time to time.
- Pressure that is too low reduces the performance of the pneumatic tool; pressure that is too high causes excessive wear.
- To prevent rust and reduce wear, clean and oil the pneumatic tool ❶ after use.
- Store the pneumatic tool in a clean and dry place.
- Ensure that the pressurised air is clean and dry.
- Drain condensation at the air filter ❹ and the compressor ❸ daily.
- Use only original accessories and tools.

- ❶ Pneumatic Tool
- ❷ Oiler for pressurised air
- ❸ Pressure reducer
- ❹ Filter / Water separator


- ❺ Shut-off valve
- ❻ Pressure relief valve
- ❼ Pressure line
- ❽ Compressor



- Proper and regular lubrication is very important for the pneumatic tool. Failure of the lubrication will dramatically reduce the performance and life of the tool.
- The rotor blades should be checked regularly by a qualified technician and replaced if necessary. All the other moving parts should be maintained when needed.



1/2" IMPACT WRENCHES



KPT-14ME 1/2" sq.drive



COMPOSITE



Ver.2 (Lever type)



Ver.3 (Button type)



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	50 - 450 (560) Nm
Free Speed	6,000 rpm
Air Consumption	13.5 l/s
Dimensions	185 x 71 x 189 mm
Net Weight	2.1 kg
Air Inlet	1/4"

KPT-14UP 1/2" sq.drive



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	50 - 500 (580) Nm
Free Speed	6,000 rpm
Air Consumption	14.5 l/s
Dimensions	185 x 64 x 190 mm
Net Weight	2.58 kg
Air Inlet	1/4"



KPT-231 1/2" sq.drive KPT-1420 1/2" sq.drive



KPT-231 KPT-1420

Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	55 - 475 (570) Nm
Free Speed	6,900 rpm / 6,300 rpm
Air Consumption	9.77 l/s / 14.49 l/s
Dimensions	195/197 x 72 x 185 mm
Net Weight	2.5 kg
Air Inlet	1/4"



KPT-14SX 1/2" sq.drive



COMPOSITE



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	50 - 300 (340) Nm
Free Speed	7,500 rpm
Air Consumption	11.8 l/s
Dimensions	173 x 60 x 172 mm
Net Weight	1.4 kg
Air Inlet	1/4"

KPT-14XP 1/2" sq.drive



COMPOSITE



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	50 - 480 (570) Nm
Free Speed	6,000 rpm
Air Consumption	12.8 l/s
Dimensions	197 x 71 x 189 mm
Net Weight	2.2 kg
Air Inlet	1/4"

KPT-14SH-M 1/2" sq.drive KPT-14SH-DL 1/2" sq.drive



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	55 - 420 (500) Nm
Free Speed	6,000 rpm
Air Consumption	13.48 l/s
Dimensions	190 x 70 x 190 mm
Net Weight	2.5 kg
Air Inlet	1/4"



KPT-14DS 1/2" sq.drive



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	35 - 285 (285) Nm
Free Speed	10,000 rpm
Air Consumption	5.83 l/s
Dimensions	142 x 58 x 176 mm
Net Weight	1.4 kg
Air Inlet	1/4"



KPT-14FX 1/2" sq.drive



COMPOSITE

Short!



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	50 - 550 (680) Nm
Free Speed	6,200 rpm
Air Consumption	8.8 l/s
Dimensions	154 x 71 x 197 mm
Net Weight	1.82 kg
Air Inlet	1/4"

KPT-14HT 1/2" sq.drive



COMPOSITE



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	108 - 610 (670) Nm
Free Speed	7,000 rpm
Air Consumption	8.83 l/s
Dimensions	195 x 62 x 192 mm
Net Weight	2.0 kg
Air Inlet	1/4"

KPT-14TR 1/2" sq.drive



COMPOSITE

Semi Industrial



Bolt Capacity	16 mm
Sq.Drive	12.7 mm
Working Torque (Max.)	30 - 300 (300) Nm
Free Speed	10,000 rpm
Air Consumption	7.5 l/s
Dimensions	168 x 55 x 170 mm
Net Weight	1.2 kg
Air Inlet	1/4"



< IMPACT WRENCH – HAMMER MECHANISM >



SINGLE HAMMER



- Powerful hitting
- Easy maintenance



PINLESS HAMMER



- Hammer & Hammer Pin are unified
- Powerful hitting



DOUBLE HAMMER



- Less vibration & stable hitting (twice per rotation)
- Long life



PIN CLUTCH



- Small hammers (round shape) realize light weight & big impact



DYNA-JAW CLUTCH



- Small hammers (flat shape) realize light weight & big impact



SINGLE LOOP CLUTCH



- High torque by centrifugal force
- Long life




DOUBLE LOOP CLUTCH



- Well balanced hitting makes stable torque
- Less vibration & Long life



3/4" IMPACT WRENCHES



KPT-25DC 3/4" sq.drive



COMPOSITE



Bolt Capacity	25 mm
Sq.Drive	19 mm
Working Torque (Max.)	270 - 900 (1,060) Nm
Free Speed	4,300 rpm
Air Consumption	14.5 l/s
Dimensions	237 x 82 x 217 mm
Net Weight	3.6 kg
Air Inlet	3/8"

KPT-25PC 3/4" sq.drive



COMPOSITE



Bolt Capacity	25 mm
Sq.Drive	19 mm
Working Torque (Max.)	280 - 1,170 (1,170) Nm
Free Speed	4,300 rpm
Air Consumption	14.5 l/s
Dimensions	268 x 82 x 217 mm
Net Weight	4.27 kg
Air Inlet	3/8"

KPT-285P 3/4" sq.drive

KPT-285PL (with 6" long anvil)



Bolt Capacity	25 mm
Sq.Drive	19 mm
Working Torque (Max.)	270 - 900 (1,500) Nm
Free Speed	5,500 rpm
Air Consumption	18.54 l/s
Dimensions	220 / 375 x 94 x 230 mm
Net Weight	5.5 / 6.5 kg
Air Inlet	3/8"

KPT-1460 3/4" sq.drive



Bolt Capacity	25 mm
Sq.Drive	19 mm
Working Torque (Max.)	280 - 1,170 (1,290) Nm
Free Speed	4,600 rpm
Air Consumption	16.18 l/s
Dimensions	280 x 98 x 220 mm
Net Weight	5.4 kg
Air Inlet	1/4"

KPT-280P 3/4" sq.drive

KPT-280PL (with 3" long anvil)



Bolt Capacity	28 mm
Sq.Drive	19 mm
Working Torque (Max.)	280 - 950 (1,300) Nm
Free Speed	4,500 rpm
Air Consumption	8.67 l/s
Dimensions	253 / 292 x 203 x 247 mm
Net Weight	6.8 / 7.0 kg
Air Inlet	3/8"

KPT-25P 3/4" sq.drive



Bolt Capacity	25 mm
Sq.Drive	19 mm
Working Torque (Max.)	150 - 1,000 (1,020) Nm
Free Speed	6,500 rpm
Air Consumption	12.3 l/s
Dimensions	230 x 75 x 215 mm
Net Weight	3.9 kg
Air Inlet	3/8"

KPT-191P 3/4" sq.drive

KPT-191PL (with 3" long anvil)



Bolt Capacity	19 mm
Sq.Drive	19 mm
Working Torque (Max.)	220 - 450 (780) Nm
Free Speed	5,900 rpm
Air Consumption	6.65 l/s
Dimensions	241 / 280 x 82 x 221 mm
Net Weight	4.2 / 4.4 kg
Air Inlet	1/4"

KPT-220P 3/4" sq.drive

KPT-220PL (with 6" long anvil)



Bolt Capacity	25 mm
Sq.Drive	19 mm
Working Torque (Max.)	140 - 610 (750) Nm
Free Speed	5,900 rpm
Air Consumption	14.15 l/s
Dimensions	245 / 400 x 78 x 213 mm
Net Weight	4.8 / 5.3 kg
Air Inlet	1/4"


KPT-1460B 3/4" sq.drive



Bolt Capacity	25 mm
Sq.Drive	19 mm
Working Torque (Max.)	150 - 580 (800) Nm
Free Speed	5,300 rpm
Air Consumption	12.33 l/s
Dimensions	215 x 72 x 215 mm
Net Weight	3.6 kg
Air Inlet	1/4"

KPT-229SL 3/4" sq.drive


(with 6" long anvil)

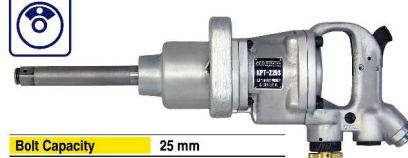

Bolt Capacity	25 mm
Sq.Drive	19 mm
Working Torque (Max.)	340 - 750 (930) Nm
Free Speed	4,500 rpm
Air Consumption	10.83 l/s
Dimensions	382 / 497 x 177 x 177 mm
Net Weight	7.0 / 7.5 kg
Air Inlet	3/8"

KPT-229S (with 2" short anvil)

3/8" & 1" IMPACT WRENCHES



KPT-12CE 3/8" sq.drive



COMPOSITE



Bolt Capacity	12 mm
Sq.Drive	9.5 mm
Working Torque (Max.)	50 - 270 (310) Nm
Free Speed	7,500 rpm
Air Consumption	11.8 l/s
Dimensions	173 x 60 x 172 mm
Net Weight	1.4 kg
Air Inlet	1/4"

KPT-12DS 3/8" sq.drive



Short!



Bolt Capacity	12 mm
Sq.Drive	9.5 mm
Working Torque (Max.)	32 - 285 (285) Nm
Free Speed	10,000 rpm
Air Consumption	5.83 l/s
Dimensions	142 x 58 x 176 mm
Net Weight	1.4 kg
Air Inlet	1/4"

KPT-12W 3/8" sq.drive



Bolt Capacity	10 mm
Sq.Drive	9.5 mm
Working Torque (Max.)	7 - 90 (120) Nm
Free Speed	12,000 rpm
Air Consumption	8.76 l/s
Dimensions	138 x 52 x 168 mm
Net Weight	1.3 kg
Air Inlet	1/4"

KPT-12BB 3/8" sq.drive



mini



Bolt Capacity	10 mm
Sq.Drive	9.5 mm
Working Torque (Max.)	5 - 50 (70) Nm
Free Speed	10,000 rpm
Air Consumption	4.4 l/s
Dimensions	137 x 40 x 47 mm
Net Weight	0.46 kg
Air Inlet	1/4"



PALM SIZE

KPT-12WX 3/8" sq.drive



Bolt Capacity	10 mm
Sq.Drive	9.5 mm
Working Torque (Max.)	7 - 90 (120) Nm
Free Speed	12,500 rpm
Air Consumption	5.06 l/s
Dimensions	177 x 43 x 86 mm
Net Weight	0.91 kg
Air Inlet	1/4"

KPT-32PC 1" sq.drive



COMPOSITE



Bolt Capacity	32 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	280 - 1,100 (1,150) Nm
Free Speed	4,300 rpm
Air Consumption	14.5 l/s
Dimensions	268 x 82 x 217 mm
Net Weight	4.27 kg
Air Inlet	3/8"

KPT-326P 1" sq.drive



Bolt Capacity	32 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	280 - 1,000 (1,650) Nm
Free Speed	5,500 rpm
Air Consumption	18.54 l/s
Dimensions	220 x 210 x 230 mm
Net Weight	5.5 kg
Air Inlet	3/8"

KPT-385P 1" sq.drive

KPT-385PL (with 8" long anvil)



Bolt Capacity	32 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	200 - 1,350 (2,200) Nm
Free Speed	4,000 rpm
Air Consumption	18.54 l/s
Dimensions	250 / 450 x 199 x 300 mm
Net Weight	9.0 / 10.4 kg
Air Inlet	1/2"

KPT-321P 1" sq.drive

KPT-321PL (with 8" long anvil)



Bolt Capacity	32 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	590 - 1,500 (2,000) Nm
Free Speed	4,300 rpm
Air Consumption	12.83 l/s
Dimensions	266 / 432 x 197 x 280 mm
Net Weight	9.5 / 11.05 kg
Air Inlet	3/8"

KPT-381P 1" sq.drive

KPT-381PL (with 8" long anvil)



Bolt Capacity	38 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	750 - 1,900 (2,500) Nm
Free Speed	4,500 rpm
Air Consumption	11.67 l/s
Dimensions	266 / 432 x 197 x 280 mm
Net Weight	10.3 / 14.3 kg
Air Inlet	3/8"

KPT-452P 1" sq.drive


KPT-452PL (with 9" long anvil)




Bolt Capacity	45 mm
Sq.Drive	25.4 mm
Working Torque (Max.)	1,200 - 2,500 (3,100) Nm
Free Speed	2,900 rpm
Air Consumption	13.33 l/s
Dimensions	322 (510) x 204 x 294 mm
Net Weight	14.2 / 16.2 kg
Air Inlet	3/8"



1" & 1-1/2" IMPACT WRENCHES



KPT-385SLA 1" sq.drive (with 8" Long anvil) KPT-385SA (with 2" short anvil)



Bolt Capacity	32 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	200 - 1,350 (2,200) Nm
Free Speed	5,000 rpm
Air Consumption	11.2 l/s
Dimensions	330 / 530 x 199 x 158 mm
Net Weight	8.6 / 9.8 kg
Air Inlet	1/2"

KPT-329SL 1" sq.drive (with 8" anvil)



Bolt Capacity	32 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	280 - 1,560 (1,900) Nm
Free Speed	3,400 rpm
Air Consumption	9.44 l/s
Dimensions	533 x 190 x 195 mm
Net Weight	13.0 kg
Air Inlet	1/2"

KPT-355SL 1" sq.drive (with 7.5" Long anvil) KPT-355S (with 2" short anvil)



Bolt Capacity	38 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	300 - 1,400 (2,000) Nm
Free Speed	3,500 rpm
Air Consumption	9.7 l/s
Dimensions	350 / 510 x 199 x 175 mm
Net Weight	9.0 / 11.0 kg
Air Inlet	1/2"

KPT-386SL 1" sq.drive (with 6" Long anvil)



Bolt Capacity	38 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	200 - 1,470 (1,500) Nm
Free Speed	4,100 rpm
Air Consumption	18.9 l/s
Dimensions	511 x 166 x 176 mm
Net Weight	7.1 kg
Air Inlet	3/8"

KPT-381SL 1" sq.drive (with 8" Long anvil) KPT-381S (with 2" short anvil)




Bolt Capacity	38 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	860 - 2,000 (2,300) Nm
Free Speed	4,400 rpm
Air Consumption	10.83 l/s
Dimensions	391 / 557 x 197 x 177 mm
Net Weight	10.5 / 12.0 kg
Air Inlet	1/2"

KPT-50SH 1" sq.drive (with 9" Long anvil) KPT-50SH-2 (with 2" short anvil)



Bolt Capacity	45 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	1,400 - 2,700 (3,200) Nm
Free Speed	2,900 rpm
Air Consumption	13.33 l/s
Dimensions	392 / 580 x 212 x 189 mm
Net Weight	14.2 / 15.5 kg
Air Inlet	1/2"

KPT-450SL 1" sq.drive (with 9" Long anvil) KPT-450S (with 2" short anvil)

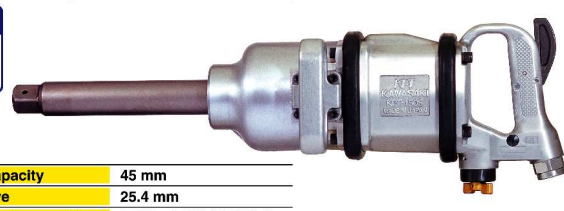

Bolt Capacity	45 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	1,200 - 2,500 (3,200) Nm
Free Speed	3,200 rpm
Air Consumption	14.17 l/s
Dimensions	444 / 632 x 220 x 198 mm
Net Weight	15.1 / 17.1 kg
Air Inlet	1/2"

KPT-500SL 1" sq.drive (with 8" anvil)



Bolt Capacity	46 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	1,700 - 2,700 (3,100) Nm
Free Speed	3,000 rpm
Air Consumption	11.67 l/s
Dimensions	632 x 220 x 198 mm
Net Weight	18.2 kg
Air Inlet	1/2"

KPT-45SD 1" sq.drive (with 8" anvil)




Bolt Capacity	45 mm
Sq. Drive	25.4 mm
Working Torque (Max.)	1,200 - 2,500 (2,700) Nm
Free Speed	2,700 rpm
Air Consumption	13.67 l/s
Dimensions	607 x 220 x 174 mm
Net Weight	17.3 kg
Air Inlet	1/2"

KPT-55SA 1-1/2" sq.drive




Bolt Capacity	55 mm (High tension bolt : 33mm)
Sq. Drive	38.1 mm
Working Torque (Max.)	1,500 - 4,200 (5,500) Nm
Free Speed	3,000 rpm
Air Consumption	14.17 l/s
Dimensions	553 x 220 x 182 mm
Net Weight	18.1 kg
Air Inlet	1/2"

RATCHET WRENCHES



KPT-3170 3/8" sq.drive KPT-3175 1/2" sq.drive

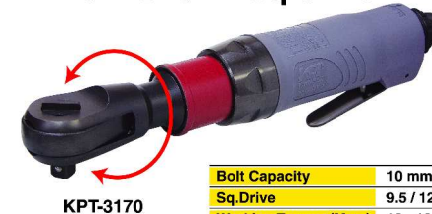


Bolt Capacity	10 mm
Sq. Drive	9.5 / 12.7 mm
Working Torque (Max.)	13 - 120 (160) Nm
Free Speed	180 rpm
Air Consumption	10.8 l/s
Dimensions	270 x 47 x 47 mm
Net Weight	1.35 kg
Air Inlet	1/4"

KPT-3305 1/4" sq.drive KPT-3315 3/8" sq.drive



Bolt Capacity	10 mm
Sq. Drive	6.35 / 9.5 mm
Working Torque (Max.)	6 - 33 (55) Nm
Free Speed	220 rpm
Air Consumption	9.44 l/s
Dimensions	200 x 36 x 42 mm
Net Weight	0.6 kg
Air Inlet	1/4"

ROTATIONAL RATCHET HEAD

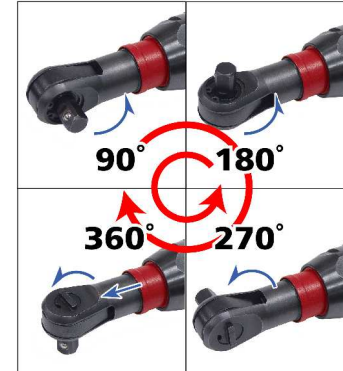

KPT-3171 3/8" sq.drive KPT-3176 1/2" sq.drive



Bolt Capacity	10 mm
Sq. Drive	9.5 / 12.7 mm
Working Torque (Max.)	13 - 120 (160) Nm
Free Speed	180 rpm
Air Consumption	10.8 l/s
Dimensions	270 x 47 x 47 mm
Net Weight	1.3 kg
Air Inlet	1/4"

KPT-3300 1/4" sq.drive KPT-3310 3/8" sq.drive

mini



Bolt Capacity	8 / 10 mm
Sq. Drive	6.35 / 9.5 mm
Working Torque (Max.)	6 - 33 (55) Nm
Free Speed	220 rpm
Air Consumption	9.44 l/s
Dimensions	200 x 36 x 42 mm
Net Weight	0.6 kg
Air Inlet	1/4"

KPT-1170 3/8" sq.drive KPT-1175 1/2" sq.drive



Bolt Capacity	10 mm
Sq. Drive	9.5 / 12.7 mm
Working Torque (Max.)	13-91 / 13-115 (160) Nm
Free Speed	160 rpm
Air Consumption	8.76 l/s
Dimensions	254 x 40 x 50 mm
Net Weight	1.2 kg
Air Inlet	1/4"

KPT-700 3/8" sq.drive KPT-705 1/4" sq.drive

mini



Bolt Capacity	10 mm
Sq. Drive	9.5 / 6.35 mm
Working Torque (Max.)	6 - 43 / 6 - 33 (55) Nm
Free Speed	310 rpm
Air Consumption	8.09 l/s
Dimensions	170 x 32 x 37 mm
Net Weight	0.5 kg
Air Inlet	1/4"

KPT-620 1/4" sq.drive KPT-625 3/8" sq.drive



Bolt Capacity	8 / 10 mm
Sq. Drive	6.35 / 9.5 mm
Working Torque (Max.)	10 - 34 / 41 (68) Nm
Free Speed	500 rpm
Air Consumption	6.6 l/s
Dimensions	155 x 39 x 39 mm
Net Weight	0.6 kg
Air Inlet	1/4"

KPT-175B 3/8" sq.drive KPT-176B 1/2" sq.drive



Bolt Capacity	13 mm
Sq. Drive	9.5 / 12.7 mm
Working Torque (Max.)	13-70(90) / 13-75(95) Nm
Free Speed	280 rpm
Air Consumption	8.09 l/s
Dimensions	290 x 47 x 52 mm
Net Weight	1.4 kg
Air Inlet	1/4"


KPT-20TR "THROUGH RATCHET" (S) KPT-25TR "THROUGH RATCHET" (L)



Hex. Drive	8, 10, 12, 14 / 17, 19, 21 mm
Working Torque (Max.)	18 (30) Nm
Free Speed	450 / 350 rpm
Air Consumption	5.8 l/s
Dimensions	210 x 29 x 27 / 250 x 36 x 27 mm
Net Weight	0.55 / 0.8 kg
Air Inlet	1/4"



DRILLS & DRILL CHUCKS



KPT-3860 3/8" (10mm)

KPT-3870 1/2" (13mm)



COMPOSITE



KPT-3860	
Chuck Capacity	10 mm
Spindle Size	3/8"- 24 THD.
Free Speed	2,000 rpm
Air Consumption	10.1 l/s
Dimensions	155 x 45 x 155 mm
Net Weight	0.95 kg
Air Inlet	1/4"

KPT-3870	
Chuck Capacity	13 mm
Spindle Size	3/8"- 24 THD.
Free Speed	380 rpm
Air Consumption	10.1 l/s
Dimensions	180 x 156 x 155 mm
Net Weight	1.3 kg
Air Inlet	1/4"

KPT-68 3/8" (10mm)

KPT-71 1/2" (13mm)



KPT-68	
Chuck Capacity	10 mm
Spindle Size	3/8"- 24 THD.
Free Speed	2,200 rpm
Air Consumption	11.12 l/s
Dimensions	195 x 43 x 151 mm
Net Weight	1.23 kg
Air Inlet	1/4"

KPT-71	
Chuck Capacity	13 mm
Spindle Size	3/8"- 24 THD.
Free Speed	500 rpm
Air Consumption	11.12 l/s
Dimensions	220 x 151 x 153 mm
Net Weight	1.63 kg
Air Inlet	1/4"

KPT-1601 3/8" (10mm)

KPT-1651 1/2" (13mm)



KPT-1601	
Chuck Capacity	10 mm
Spindle Size	3/8"- 24 THD.
Free Speed	2,500 rpm
Air Consumption	11.12 l/s
Dimensions	175 x 43 x 135 mm
Net Weight	0.96 kg
Air Inlet	1/4"

KPT-1651	
Chuck Capacity	13 mm
Spindle Size	3/8"- 24 THD.
Free Speed	550 rpm
Air Consumption	11.12 l/s
Dimensions	225 x 151 x 135 mm
Net Weight	1.58 kg
Air Inlet	1/4"

KPT-64ADR 3/8" (10mm)

KPT-66ADR 1/2" (13mm)



KPT-64ADR	
Chuck Capacity	10 mm
Spindle Size	3/8"- 24 THD.
Free Speed	1,800 rpm
Air Consumption	9.1 l/s
Dimensions	208 x 41 x 100 mm
Net Weight	0.98 kg
Air Inlet	1/4"

KPT-66ADR	
Chuck Capacity	13 mm
Spindle Size	3/8"- 24 THD.
Free Speed	450 rpm
Air Consumption	9.1 l/s
Dimensions	208 x 40 x 115 mm
Net Weight	1.2 kg
Air Inlet	1/4"

KPT-1620 3/8" (10mm)



KPT-1620	
Chuck Capacity	10 mm
Spindle Size	3/8"- 24 THD.
Free Speed	3,300 rpm
Air Consumption	7.8 l/s
Dimensions	180 x 36 x 143 mm
Net Weight	0.98 kg
Air Inlet	1/4"



KPT-63D 3/8" (10mm)



KPT-63D	
Chuck Capacity	10 mm
Spindle Size	3/8"- 24 THD.
Free Speed	2,500 rpm
Air Consumption	7.75 l/s
Dimensions	170 x 40 x 123 mm
Net Weight	0.74 kg
Air Inlet	1/4"

KPT-74B 3/8" (10mm)



KPT-74B	
Chuck Capacity	10 mm
Spindle Size	3/8"- 24 THD.
Free Speed	3,800 rpm
Air Consumption	11.12 l/s
Dimensions	192 x 39 x 58 mm
Net Weight	0.725 kg
Air Inlet	1/4"

KLS-10 (10mm) KLS-13 (13mm)

KEYLESS CHUCKS

KLS-10

KLS-13



KHB-10 (10mm) KHB-13 (13mm)

HYBRID DRILL CHUCKS

KHB-10

KHB-13



K-3 (10mm) K-6 (13mm)


STANDARD DRILL CHUCKS

K-3

K-6



SCREW & IMPACT DRIVERS



KPT-SD110



KPT-SD110	
Capacity	6 mm
Hex Drive	6.35 mm
Working Torque	5 - 34.3 Nm
Free Speed	2,200 rpm
Air Consumption	5.06 l/s
Dimensions	205 x 43 x 153 mm
Net Weight	1.2 kg
Air Inlet	1/4"

ADJUSTABLE CLUTCH MECHANISM

KPT-SD120



KPT-SD120	
Capacity	6 mm
Hex Drive	6.35 mm
Working Torque	5 - 15 Nm
Free Speed	1,800 rpm
Air Consumption	5.06 l/s
Dimensions	250 x 40 x 55 mm
Net Weight	1.1 kg
Air Inlet	1/4"

KPT-SD110A

EXTERNAL ADJUSTMENT



KPT-SD110A	
Capacity	6 mm
Hex Drive	6.35 mm
Working Torque	11 - 17 Nm
Free Speed	2,200 rpm
Air Consumption	5.06 l/s
Dimensions	205 x 43 x 153 mm
Net Weight	1.35 kg
Air Inlet	1/4"



KPT-SD150

LOW SPEED (800 rpm)



KPT-SD150	
Capacity	6 mm
Hex Drive	6.35 mm
Working Torque	5 - 15 Nm
Free Speed	800 rpm
Air Consumption	5.06 l/s
Dimensions	240 x 43 x 153 mm
Net Weight	1.35 kg
Air Inlet	1/4"

KPT-SD160

LOW SPEED (800 rpm)



KPT-SD160	
Capacity	6 mm
Hex Drive	6.35 mm
Working Torque	5 - 15 Nm
Free Speed	800 rpm
Air Consumption	5.06 l/s
Dimensions	265 x 40 x 55 mm
Net Weight	1.3 kg
Air Inlet	1/4"



KPT-875

IMPACT DRIVER (Second version)



KPT-875	
Capacity	6 - 8 mm
Hex Drive	6.35 mm
Working Torque	7 - 70 Nm
Free Speed	11,500 rpm
Air Consumption	10.78 l/s
Dimensions	150 x 50 x 160 mm
Net Weight	1.2 kg
Air Inlet	1/4"

KPT-85 ID

IMPACT DRIVER (Second version)



KPT-85 ID	
Capacity	6 mm
Hex Drive	6.35 mm
Working Torque	7 - 41 Nm
Free Speed	16,000 rpm
Air Consumption	6.74 l/s
Dimensions	125 x 38 x 157 mm
Net Weight	0.7 kg
Air Inlet	1/4"

KPT-12 ID

IMPACT DRIVER



mini



KPT-12 ID	
Capacity	6 mm
Hex Drive	6.35 mm
Working Torque	5 - 50 Nm
Free Speed	10,000 rpm
Air Consumption	4.4 l/s
Dimensions	143 x 40 x 47 mm
Net Weight	0.46 kg
Air Inlet	1/4"



KPT-90 ID


IMPACT DRIVER





KPT-90 ID	
Capacity	4 - 5 mm
Hex Drive	6.35 mm
Working Torque	5 - 15 Nm
Free Speed	9,000 rpm
Air Consumption	4.4 l/s
Dimensions	187 x 42 x 52 mm
Net Weight	0.83 kg
Air Inlet	1/4"

KPT-885

IMPACT DRIVER



KPT-885	
Capacity	6 - 8 mm
Hex Drive	6.35 mm
Working Torque	10 - 80 Nm
Free Speed	7,600 rpm
Air Consumption	5.66 l/s
Dimensions	154 x 51 x 190 mm
Net Weight	1.5 kg
Air Inlet	1/4"



KPT-3200



Collet Size	6 or 6.35 mm
Free Speed	23,000 rpm
Air Consumption	9.44 l/s
Dimensions	153 x 39 x 42 mm
Net Weight	0.41 kg
Air Inlet	1/4"

KPT-3210



Collet Size	6 or 6.35 mm
Free Speed	20,000 rpm
Air Consumption	9.11 l/s
Dimensions	160 x 39 x 76 mm
Net Weight	0.55 kg
Air Inlet	1/4"

KPT-3220



Collet Size	6 or 6.35 mm
Free Speed	20,000 rpm
Air Consumption	9.44 l/s
Dimensions	194 x 39 x 76 mm
Net Weight	0.56 kg
Air Inlet	1/4"

KPT-22DGBS



Collet Size	6 or 6.35 mm
Free Speed	25,000 rpm
Air Consumption	7.67 l/s
Dimensions	120 x 33 x 41 mm
Net Weight	0.4 kg
Air Inlet	1/4"

KPT-24DGBS



Collet Size	6 or 6.35 mm
Free Speed	20,000 rpm
Air Consumption	9.33 l/s
Dimensions	139 x 39 x 41 mm
Net Weight	0.6 kg
Air Inlet	1/4"

KPT-26DGBS



Collet Size	6 or 6.35 mm
Free Speed	15,000 rpm
Air Consumption	7.67 l/s
Dimensions	123 x 33 x 73 mm
Net Weight	0.4 kg
Air Inlet	1/4"

KPT-1220S

KPT-1240S



KPT-1220S

KPT-1240S

	KPT-1220S	KPT-1240S
Collet Size	6 or 6.35 mm	6 or 6.35 mm
Free Speed	32,000 rpm	21,000 rpm
Air Consumption	8.43 l/s	11.12 l/s
Dimensions	160 x 32 x 65 mm	164 x 40 x 73 mm
Net Weight	0.39 kg	0.645 kg
Air Inlet	1/4"	1/4"

KPT-24DG



Collet Size	6 or 6.35 mm
Free Speed	23,000 rpm
Air Consumption	11.46 l/s
Dimensions	145 x 40 x 59 mm
Net Weight	0.54 kg
Air Inlet	1/4"

KPT-28DGS



Collet Size	6 or 6.35 mm
Free Speed	3,800 rpm
Air Consumption	11.12 l/s
Dimensions	192 x 39 x 58 mm
Net Weight	0.725 kg
Air Inlet	1/4"

KPT-PG3

MINI PENCIL DIE GRINDER

KPT-PG6

MINI PENCIL DIE GRINDER

mini



	KPT-PG3	KPT-PG6
Collet Size	3 mm	6 mm
Free Speed	55,000 rpm	32,000 rpm
Air Consumption	3.34 l/s	5.0 l/s
Dimensions	135 x 16 x 74 mm	150 x 23 x 83 mm
Net Weight	0.11 kg	0.27 kg
Air Inlet	1/4"	1/4"

KPT-NG25A-CS SAFETY LEVER

KPT-NG25A-CR ROTARY



	KPT-NG25A-CS	KPT-NG25A-CR
Collet Size	6 or 6.35 mm	6 or 6.35 mm
Free Speed	24,000 rpm	24,000 rpm
Air Consumption	6.67 l/s	6.67 l/s
Dimensions	179 x 37 x 37 mm	169 x 37 x 37 mm
Net Weight	0.65 kg	0.7 kg
Air Inlet	1/4"	1/4"

KPT-NG25A-CR

KPT-NG45A-CS SAFETY LEVER



Collet Size	6 or 6.35 mm
Free Speed	20,000 rpm
Air Consumption	6.67 l/s
Dimensions	157 x 38 x 38 mm
Net Weight	0.6 kg
Air Inlet	3/8"

KPT-NG65A-CS SAFETY LEVER



Collet Size	6 or 6.35 mm
Free Speed	16,000 rpm
Air Consumption	8.34 l/s
Dimensions	365 x 47 x 47 mm
Net Weight	1.3 kg
Air Inlet	3/8"

KPT-NG75A-CS SAFETY LEVER



Collet Size	6 or 6.35 mm
Free Speed	15,000 rpm
Air Consumption	10.0 l/s
Dimensions	365 x 50 x 50 mm
Net Weight	1.4 kg
Air Inlet	3/8"

KPT-NG65L-CS SAFETY LEVER



Collet Size	6 or 6.35 mm
Free Speed	16,000 rpm
Air Consumption	8.34 l/s
Dimensions	425 x 47 x 47 mm
Net Weight	1.4 kg
Air Inlet	3/8"

KPT-NG75L-CS SAFETY LEVER



Collet Size	6 or 6.35 mm
Free Speed	15,000 rpm
Air Consumption	10.0 l/s
Dimensions	570 x 50 x 50 mm
Net Weight	2.4 kg
Air Inlet	3/8"

KPT-NG45A-CR ROTARY



Collet Size	6 or 6.35 mm
Free Speed	20,000 rpm
Air Consumption	6.67 l/s
Dimensions	167 x 36 x 36 mm
Net Weight	0.7 kg
Air Inlet	3/8"

KPT-NG65A-CR ROTARY



Collet Size	6 or 6.35 mm
Free Speed	16,000 rpm
Air Consumption	8.34 l/s
Dimensions	310 x 47 x 47 mm
Net Weight	1.2 kg
Air Inlet	3/8"

KPT-NG75A-CR ROTARY



Collet Size	6 or 6.35 mm
Free Speed	15,000 rpm
Air Consumption	10.0 l/s
Dimensions	310 x 50 x 50 mm
Net Weight	1.4 kg
Air Inlet	3/8"

KPT-NG65L-CR ROTARY





Collet Size	6 or 6.35 mm
Free Speed	16,000 rpm
Air Consumption	8.34 l/s
Dimensions	370 x 47 x 47 mm
Net Weight	1.4 kg
Air Inlet	3/8"

KPT-NG75L-CR ROTARY



Collet Size	6 or 6.35 mm
Free Speed	15,000 rpm
Air Consumption	10.0 l/s
Dimensions	515 x 50 x 50 mm
Net Weight	2.4 kg
Air Inlet	3/8"



KPT-NG65A-DS for 2.5" disc



Disc Capacity	65 mm
Spindle Size	3/8"-16 THD.
Free Speed	16,000 rpm
Air Consumption	8.34 l/s
Dimensions	335 x 47 x 80 mm
Net Weight	1.4 kg
Air Inlet	3/8"

KPT-NG65A-DR for 2.5" disc



Disc Capacity	65 mm
Spindle Size	3/8"-16 THD.
Free Speed	16,000 rpm
Air Consumption	8.34 l/s
Dimensions	220 x 47 x 80 mm
Net Weight	1.3 kg
Air Inlet	3/8"

KPT-NG75A-DS for 3" disc



Disc Capacity	75 mm
Spindle Size	3/8"-16 THD.
Free Speed	15,000 rpm (w/o governor)
Air Consumption	10.01 l/s
Dimensions	335 x 50 x 88 mm
Net Weight	1.5 kg
Air Inlet	3/8"

KPT-NG75A-DR for 3" disc



Disc Capacity	75 mm
Spindle Size	3/8"-16 THD.
Free Speed	15,000 rpm (w/o governor)
Air Consumption	10.01 l/s
Dimensions	280 x 50 x 88 mm
Net Weight	1.5 kg
Air Inlet	3/8"

KPT-NG125A-DS for 5" disc

KPT-NG125A-DSG with safety governor



Disc Capacity	125 mm
Spindle Size	1/2"-12 THD.
Free Speed	13,000 rpm (w/o governor)
	7,200 rpm (with governor)
Air Consumption	20.85 l/s
Dimensions	430 x 66 x 143 mm
Net Weight	3.1 kg
Air Inlet	1/2"

KPT-NG125A-DR for 5" disc

KPT-NG125A-DRG with safety governor



Disc Capacity	125 mm
Spindle Size	1/2"-12 THD.
Free Speed	13,000 rpm (w/o governor)
	7,200 rpm (with governor)
Air Consumption	20.85 l/s
Dimensions	395 x 66 x 143 mm
Net Weight	3.1 kg
Air Inlet	1/2"

KPT-NG150A-DS for 6" disc

KPT-NG150A-DSG with safety governor



Disc Capacity	150 mm
Spindle Size	5/8"-11 THD.
Free Speed	10,000 rpm (w/o governor)
	6,000 rpm (with governor)
Air Consumption	20.85 l/s
Dimensions	490 x 74 x 165 mm
Net Weight	4.4 kg
Air Inlet	1/2"

KPT-NG150A-DR for 6" disc

KPT-NG150A-DRG with safety governor



Disc Capacity	150 mm
Spindle Size	5/8"-11 THD.
Free Speed	10,000 rpm (w/o governor)
	6,000 rpm (with governor)
Air Consumption	20.85 l/s
Dimensions	445 x 74 x 165 mm
Net Weight	4.4 kg
Air Inlet	1/2"

KPT-58L for 2" disc [SAFETY LEVER]

KPT-58R for 2" disc [ROTARY]



	KPT-58L / KPT-58R
Disc Capacity	58 mm
Free Speed	22,000 rpm
Air Consumption	6.67 l/s
Dimensions	130 x 72 x 60 mm (58L)
	135 x 72 x 60 mm (58R)
Net Weight	0.53 kg / 0.51 kg
Air Inlet	1/4"



KPT-100AL for 4" disc

[SAFETY LEVER]



Disc Capacity	100 mm
Spindle Size	M10 x 1.5 THD.
Free Speed	12,000 rpm
Air Consumption	9.44 l/s
Dimensions	229 x 195 x 82 mm
Net Weight	1.7 kg
Air Inlet	1/4"

KPT-100ARG for 4" disc

[ROTARY]



Disc Capacity	100 mm
Spindle Size	M10 x 1.5 THD.
Free Speed	12,000 rpm
Air Consumption	9.44 l/s
Dimensions	235 x 195 x 82 mm
Net Weight	2.0 kg
Air Inlet	1/4"

KPT-126 for 5" disc

[SAFETY LEVER]



Disc Capacity	125 mm
Spindle Size	M14 x 2.0 THD.
Free Speed	12,000 rpm
Air Consumption	9.44 l/s
Dimensions	229 x 200 x 82 mm
Net Weight	1.7 kg
Air Inlet	1/4"

KPT-125A for 5" disc

[SAFETY LEVER]



Disc Capacity	125 mm
Spindle Size	M14 x 2.0 THD.
Free Speed	12,000 rpm
Air Consumption	9.44 l/s
Dimensions	229 x 200 x 82 mm
Net Weight	1.7 kg
Air Inlet	1/4"

KPT-184 for 7" disc

[SAFETY LEVER]





Disc Capacity	180 mm
Spindle Size	M14 / M16 x 2.0 THD.
Free Speed	7,500 rpm
Air Consumption	13.1 l/s
Dimensions	320 x 255 x 110 mm
Net Weight	3.5 kg
Air Inlet	3/8"

KPT-183 for 7" disc

[ROTARY]



Disc Capacity	180 mm
Spindle Size	M14 / M16 x 2.0 THD.
Free Speed	7,500 rpm
Air Consumption	13.1 l/s
Dimensions	270 x 255 x 110 mm
Net Weight	3.5 kg
Air Inlet	3/8"



KPT-160DA D/A SANDER

KPT-160DAF DUST EXTRACTION



KPT-161DA/161DAF
Orbit Dia.....7 mm

Pad Size	125 / 150 mm
Orbit Dia	10 mm
Spindle Size	5/16"-24 THD.
Free Speed	10,000 rpm
Air Consumption	6.67 l/s
Dimensions (5" Pad)	240 x 123 x 119 mm
(6" Pad)	253 x 148 x 119 mm
Net Weight	1.5 kg
Air Inlet	1/4"

KPT-99 (5") · KPT-99L (6")

DA SANDER EXTRA DUTY DUST EXTRACTION



Pad Size	125 mm (99) / 150 mm(99L)
Orbit Dia	10 mm
Spindle Size	5/16"-24 THD.
Free Speed	9,000 rpm
Air Consumption	6.67l/s
Dimensions (99)	242 x 123 x 122 mm
(99L)	254 x 148 x 122 mm
Net Weight	2.7 kg
Air Inlet	1/4"

KPT-225DA D/A SANDER



Pad Size	125 / 150 mm
Orbit Dia	6 mm
Spindle Size	5/16"-24 THD.
Free Speed	11,000 rpm
Air Consumption	6.67 l/s
Dimensions (5")	265 x 123 x 122 mm
(6")	278 x 148 x 122 mm
Net Weight	1.7 kg
Air Inlet	1/4"

KPT-172 ORBITAL SANDER



Pad Size	112 x 220 mm
Orbit Dia	5 mm
Free Speed	6,500 rpm
Air Consumption	6.67 l/s
Dimensions	284 x 112 x 132 mm
Net Weight	2.3 kg
Air Inlet	1/4"

KPT-96 · KPT-97 ORBITAL SANDER

EXTRA DUTY DUST EXTRACTION



	KPT-96	KPT-97
Pad Size	93 x 176 mm	112 x 220 mm
Orbit Dia	5 mm	
Free Speed	6,000 rpm	
Air Consumption	6.67 l/s	
Dimensions	293 x 93 x 118 mm	293 x 112 x 118 mm
Net Weight	2.3 kg	2.6 kg
Air Inlet	1/4"	

KPT-166DA D/A SANDER

KPT-166DAF DUST EXTRACTION



Pad Size	125 / 150 mm
Orbit Dia	5 mm
Spindle Size	5/16"-24 THD.
Free Speed	9,000 rpm
Air Consumption	6.63 l/s
Dimensions (5")	158 x 123 x 90 mm
(6")	171 x 148 x 90 mm
Net Weight	0.95 kg
Air Inlet	1/4"

KPT-3500 5/6" D/A SANDER

KPT-3500F DUST EXTRACTION



Pad Size	125 / 150 mm
Orbit Dia	5 mm
Spindle Size	5/16"-24 THD.
Free Speed	10,000 rpm
Air Consumption	7.2 l/s
Dimensions (5")	175 x 123 x 91 mm
(6")	188 x 148 x 91 mm
Net Weight	0.9 / 0.93 kg
Air Inlet	1/4"

KPT-174 ORBITAL SANDER

KPT-174F DUST EXTRACTION



Pad Size	73 x 145 mm
Orbit Dia	5 mm
Free Speed	8,000 rpm
Air Consumption	5.67 l/s
Dimensions	160 x 74 x 88 mm
Net Weight	1.2 kg
Air Inlet	1/4"

KPT-3600 ORBITAL SANDER

KPT-3600F DUST EXTRACTION



Pad Size	72 x 106 mm
Orbit Dia	3 mm
Free Speed	8,500 rpm
Air Consumption	6.33 l/s
Dimensions	255 x 72 x 70 mm
Net Weight	0.74 kg
Air Inlet	1/4"

KPT-162DA D/A SANDER

KPT-162DAF DUST EXTRACTION



Pad Size	125 / 150 mm
Orbit Dia	5 mm
Spindle Size	5/16"-24 THD.
Free Speed	10,000 rpm
Air Consumption	6.67 l/s
Dimensions (5" Pad)	240 x 123 x 106 mm
(6" Pad)	253 x 148 x 106 mm
Net Weight	1.5 kg
Air Inlet	1/4"

KPT-3540

D/A SANDER 4"



Pad Size	98 mm
Orbit Dia	5 mm
Spindle Size	5/16"-24 THD.
Free Speed	8,500 rpm
Air Consumption	5.87 l/s
Dimensions	162 x 98 x 75 mm
Net Weight	0.7 kg
Air Inlet	1/4"

KPT-165DA-V2

MINI D/A SANDER/POLISHER 2"



Pad Size	45 mm
Orbit Dia	3 mm
Spindle Size	5/16"-24 THD.
Free Speed	10,000 rpm
Air Consumption	4.67 l/s
Dimensions	208 x 72 x 95 mm
Net Weight	0.7 kg
Air Inlet	1/4"

KPT-173 ORBITAL SANDER



Pad Size	93 x 176 mm
Orbit Dia	5 mm
Free Speed	7,000 rpm
Air Consumption	6.67 l/s
Dimensions	208 x 93 x 180 mm
Net Weight	1.9 kg
Air Inlet	1/4"

KPT-170 MINI ORBITAL SANDER

KPT-170L LONG PAD TYPE KPT-170F DUST EXTRACTION



	KPT-170 / 170F	KPT-170L
Pad Size	73x98mm	73x140mm
Orbit Dia	3 mm	
Free Speed	9,000 rpm	7,000 rpm
Air Consumption	4.34 l/s	
Dimensions	149x71x73mm	175x71x73mm
Net Weight	1.0 kg	
Air Inlet	1/4"	

KPT-810K-V2

MULTIPLE SANDER



Pad Size	40 x 85 mm
Orbit Dia	3 mm
Free Speed	10,000
Air Consumption	4.67 l/s
Dimensions	249 x 41.5 x 92 mm
Net Weight	0.7 kg
Air Inlet	1/4"

KPT-1320F-5 D/A SANDER 5"

KPT-1320F-6 D/A SANDER 6" DUST EXTRACTION



Pad Size	125 mm / 150 mm
Orbit Dia	5 mm
Spindle Size	5/16"-24 THD.
Free Speed	10,000 rpm
Air Consumption	8.09 l/s
Dimensions (5")	215 x 123 x 87 mm
(6")	228 x 148 x 87 mm
Net Weight	1.0 kg
Air Inlet	1/4"

KPT-1325 D/A SANDER

KPT-1325F DUST EXTRACTION



Pad Size	125 mm / 150 mm
Orbit Dia	5 mm
Spindle Size	5/16"-24 THD.
Free Speed	9,500 rpm
Air Consumption	6.74 l/s
Dimensions (5")	155 x 123 x 80 mm
(6")	168 x 148 x 80 mm
Net Weight	1.0 kg
Air Inlet	1/4"



MP : Magic (Velcro) Pad
LP : Leather (Glue) Pad

KPT-1360F ORBITAL SANDER

DUST EXTRACTION



Pad Size	95 x 177 mm
Orbit Dia	5 mm
Free Speed	7,000 rpm
Air Consumption	8.09 l/s
Dimensions	240 x 82 x 87 mm
Net Weight	1.57 kg
Air Inlet	1/4"

KPT-1365 ORBITAL SANDER





Pad Size	75 x 95 mm
Orbit Dia	3 mm
Free Speed	9,500 rpm
Air Consumption	6.74 l/s
Dimensions	150 x 73 x 75 mm
Net Weight	0.86 kg
Air Inlet	1/4"

KPT-3664 WATER SANDER

KPT-3662



	KPT-3664	KPT-3662
Pad Size	72 x 146 mm	72 x 106 mm
Orbit Dia	3 mm	
Free Speed	8,500 rpm	
Air Consumption	6.33 l/s	
Dimensions	146 x 72 x 75 mm	110 x 72 x 75 mm
Net Weight	0.8 kg	
Air Inlet	1/4"	



KPT-34S 7" SANDER KPT-38S 7" SANDER



KPT-38S

Pad Size	180 mm
Spindle Size	5/8"-11 THD.
Free Speed	5,200 rpm (34S) / 5,400 rpm (38S)
Air Consumption	11.12 / 13.48 l/s
Dimensions	192 x 200 x 172 mm (34S) 406 x 243 x 98 mm (38S)
Net Weight	2.1 kg (34S) / 2.4 kg (38S)
Air Inlet	1/4"

KPT-34S

KPT-36P 7" POLISHER KPT-37P 7" POLISHER



KPT-37P

Disc Size	180 mm
Buff Dia.	205 mm
Spindle Size	5/8"-11 THD.
Free Speed	2,500 rpm (36P) / 3,800 rpm (37P)
Air Consumption	11.12 / 13.48 l/s
Dimensions	192 x 200 x 172 mm (36P) 406 x 243 x 98 mm (37P)
Net Weight	2.1 kg (36P) / 2.4 kg (37P)
Air Inlet	1/4"

KPT-36P

KPT-425 SANDER/POLISHER with 5" Pad



Pad Size	123 mm
Spindle Size	5/16"-24 THD.
Free Speed	3,000 rpm
Air Consumption	7.5 l/s
Dimensions	234 x 123 x 142 mm
Net Weight	1.2 kg
Air Inlet	1/4"

KPT-435 MINI ANGLE POLISHER with Buffer



Pad Size	70 mm
Free Speed	2,500 rpm
Air Consumption	5.8 l/s
Dimensions	231 x 70 x 75 mm
Net Weight	0.7 kg
Air Inlet	1/4"

KPT-438 SANDER/POLISHER



Pad Size	72 mm
Spindle Size	5/16"-24 THD.
Free Speed	3,500 rpm
Air Consumption	6.34 l/s
Dimensions	207 x 72 x 105 mm
Net Weight	0.7 kg
Air Inlet	1/4"

KPT-46SX 5" SANDER



Pad Size	125 mm
Free Speed	15,000 rpm
Air Consumption	12.8 l/s
Dimensions	124 x 43 x 155 mm
Net Weight	0.96 kg
Air Inlet	1/4"



KPT-370 BELT SANDER 10mm

Belt Size	10 x 330 mm
Free Speed	16,000 rpm
Air Consumption	10.78 l/s
Dimensions	275 x 80 x 160 mm
Net Weight	0.8 kg
Air Inlet	1/4"



KPT-520 BELT SANDER 20mm

Belt Size	20 x 520 mm
Free Speed	17,000 rpm
Air Consumption	14.2 l/s
Dimensions	365 x 87 x 190 mm
Net Weight	1.4 kg
Air Inlet	1/4"



KPT-1100 SAW/FILE KIT with saw blade, 3 files & ex. hose



32T for Steel	Cutting Cap	1.5 mm
Round File	Piston Stroke	9.0 mm
Flat File	Free Speed	5,000 rpm
Triangle File	Air Consumption	5.39 l/s
	Dimensions	278 x 36 x 38 mm
	Net Weight	0.9 kg
	Air Inlet	1/4"

KPT-720 SAW with saw blades



Cutting Cap	1.5 mm
Piston Stroke	8.7 mm
Free Speed	11,000 rpm
Air Consumption	5.39 l/s
Dimensions	250 x 40 x 37 mm
Net Weight	0.5 kg
Air Inlet	1/4"

KPT-1150 MINI SAW with saw blade

mini



Cutting Cap	1 mm
Piston Stroke	5 mm
Free Speed	3,400 rpm
Air Consumption	5.39 l/s
Dimensions	222 x 30 x 30 mm
Net Weight	0.45 kg
Air Inlet	1/4"

KPT-52 HAMMER


KPT-52K HAMMER KIT KPT-52H HAMMER (HEX. TYPE)



Shank Opening	10.2 mm
Piston Dia.	19 mm
Piston Stroke	55 mm
Blows/min.	3,000 bpm
Dimension	216 x 50 x 157 mm
Air Consumption	6.74 l/s
Net Weight	1.65 kg
Air Inlet	1/4"



KPT-52K Weight.....2.6 kg



KPT-52H HAMMER
HEXAGONAL TYPE

KPT-S2 SCALING HAMMER



Piston Dia.	30 x 24 x 80 mm
Piston Stroke	25 mm
Blows/min.	8,000 bpm
Air Consumption	5.0 l/s
Dimensions	480 x 48 x 115 mm
Net Weight	2.3 kg
Air Inlet	3/8"

KPT-J5 • KPT-J10 • KPT-J15 JUMBO SCRAPERS



	KPT-J5	KPT-J10	KPT-J15
Piston Dia.	25 mm	25 mm	25 mm
Piston Stroke	22 mm	22 mm	22 mm
Blows/min.	4,000 bpm	4,000 bpm	4,000 bpm
Air Consumption	6.67 l/s	6.67 l/s	6.67 l/s
Dimensions	750 x 45 x 45 mm	1,000 x 45 x 45 mm	1,500 x 45 x 45 mm
Net Weight	3.0 kg	3.7 kg	5.2 kg
Air Inlet	3/8"	3/8"	3/8"

KPT-516H HEAVY DUTY RIVETER KPT-516HS HEAVY DUTY AUTOMATIC RIVETER

KPT-516HS



KPT-516H

KPT-516H / 516HS		
Capacity	Rivet	2.4, 3.2, 4.0, 4.8, 6.4 mm
	Mandrel	3/32, 1/8, 5/32, 3/16, 1/2"
		6.4 mm except stainless steel
Piston Stroke		18 mm
Air Consumption		0.4 lit. / rivet
Dimensions		260 x 89 x 320 mm
Net Weight		2.1 / 2.4 kg
Air Inlet		3/8"


KPT-517H HEAVY DUTY RIVETER KPT-517HS HEAVY DUTY AUTOMATIC RIVETER

KPT-517H



KPT-517HS


KPT-517H / 517HS		
Capacity	Rivet	2.4, 3.2, 4.0, 4.8 mm
	Mandrel	3/32, 1/8, 5/32, 3/16"
Piston Stroke		15 mm
Air Consumption		0.26 lit. / rivet
Dimensions		229 x 78 x 270 mm
Net Weight		1.5 / 1.7 kg
Air Inlet		3/8"



KPT-F1 FLUX CHIPPER




Piston Dia.	20 mm
Piston Stroke	12 mm
Blows/min.	5,000 bpm
Air Consumption	2.5 l/s
Dimensions	175 x 33 x 38 mm
Net Weight	0.9 kg
Air Inlet	1/4"




KPT-F2 FLUX CHIPPER




Piston Dia.	22 mm
Piston Stroke	22 mm
Blows/min.	4,000 bpm
Air Consumption	4.17 l/s
Dimensions	187 x 37 x 40 mm
Net Weight	1.1 kg
Air Inlet	1/4"



KPT-F3 • KPT-F5 FLUX CHIPPERS



	KPT-F3	KPT-F4	KPT-F5	KPT-F6
Piston Dia.	20 mm	20 mm	25 mm	25 mm
Piston Stroke	12 mm	12 mm	22 mm	22 mm
Blows/min.	4,000 bpm	4,000 bpm	4,000 bpm	4,000 bpm
Air Consumption	4.17 l/s	4.17 l/s	6.67 l/s	6.74 l/s
Dimensions	198x54x167mm	395x54x167mm	232x42x63mm	410x44x63mm
Net Weight	1.8 kg	2.7 kg	1.7 kg	2.6 kg
Air Inlet	1/4"	1/4"	1/4"	1/4"

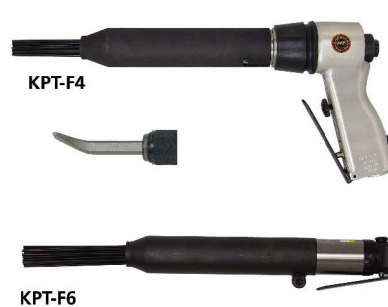


KPT-F4 • KPT-F6 FLUX CHIPPER & NEEDLE SCALER KITS

KPT-1~KPT-7 SAND RAMMERS



SPECIFICATIONS

Model	Piston Dia.	Piston Stroke	Blow / Min.	Air Cons	Dimensions L (φ1) x W x H	Net Weight	Air Inlet
KPT-1 (FR00)	18 mm	50 mm	1,800 bpm	6.67 l/s	430 (230) x 36.5 x 65 mm	2.0 kg	3/8"
KPT-1L (FR00L)	18 mm	50 mm	1,800 bpm	6.67 l/s	940 (740) x 45 x 39 mm	3.0 kg	3/8"
KPT-2 (FR0)	22 mm	65 mm	1,000 bpm	8.34 l/s	470 (277) x 41 x 68 mm	3.0 kg	3/8"
KPT-2L (FR0L)	22 mm	65 mm	1,000 bpm	8.34 l/s	989 (796) x 50 x 50 mm	4.0 kg	3/8"
KPT-3 (FR1B)	25.4 mm	100 mm	800 bpm	11.67 l/s	619 (400) x 60 x 77 mm	6.0 kg	3/8"
KPT-4 (FR1)	25.4 mm	100 mm	800 bpm	11.67 l/s	1,165 (946) x 63 x 70 mm	8.0 kg	1/2"
KPT-5 (FR2)	32 mm	127 mm	700 bpm	14.18 l/s	1,300 (987) x 68 x 68 mm	9.4 kg	1/2"
KPT-6 (FR3)	38 mm	152 mm	600 bpm	15.0 l/s	1,330 (1,013) x 79 x 79 mm	14.0 kg	1/2"
KPT-7 (FR4)	42 mm	152 mm	600 bpm	16.68 l/s	1,335 (1,035) x 83 x 83 mm	16.0 kg	1/2"



NC-0S • NC-1S • NC-2S • NC-3S CHIPPING HAMMERS

TYPE "H": HEX. SHANK
TYPE "R": ROUND SHANK



NC-0S

	NC-0S	NC-1S	NC-2S	NC-3S
Piston Dia.	20 mm	28.5 mm	28.5 mm	28.5 mm
Piston Stroke	45 mm	26 mm	52 mm	76 mm
Blows/min.	3,000 bpm	3,000 bpm	2,600 bpm	2,300 bpm
Air Consumption	5.84 l/s	9.17 l/s	10.0 l/s	10.0 l/s
Dimensions	246 x 51 x 136 mm	355 x 74 x 150 mm	375 x 74 x 150 mm	420 x 74 x 150 mm
Net Weight	2.6 kg	5.5 kg	6.2 kg	6.5 kg
Air Inlet	3/8"	3/8"	3/8"	3/8"
Hose Dia.	9.5 mm	9.5 mm	9.5 mm	9.5 mm

AA-10A • AA-15A • AA-20S • AA-30S CHIPPING HAMMERS

TYPE "H": HEX. SHANK
TYPE "R": ROUND SHANK



AA-10A

	AA-10A	AA-15A	AA-20S	AA-30S
Piston Dia.	24 mm	24 mm	28 mm	28 mm
Piston Stroke	52 mm	70 mm	55 mm	79 mm
Blows/min.	2,800 bpm	2,200 bpm	2,600 bpm	2,200 bpm
Air Consumption	6.67 l/s	6.67 l/s	8.33 l/s	8.33 l/s
Dimensions	295 x 70 x 180 mm	330 x 70 x 180 mm	315 x 76 x 175 mm	345 x 76 x 175 mm
Net Weight	4.2 kg	4.7 kg	5.7 kg	6.2 kg
Air Inlet	3/8"	3/8"	3/8"	3/8"
Hose Dia.	12.7 mm	12.7 mm	12.7 mm	12.7 mm

CB-10 • CB-20 • CB-30 • CB-35 CONCRETE BREAKERS

TYPE "R": ROUND SHANK




CB-10

	CB-10	CB-20	CB-30	CB-35
Piston Dia.	35 mm	40 mm	45 mm	45 mm
Piston Stroke	102 mm	165 mm	165 mm	200 mm
Blows/min.	1,700 bpm	1,000 bpm	850 bpm	800 bpm
Air Consumption	16.68 l/s	20.01 l/s	23.35 l/s	25.02 l/s
Dimensions	470 x 88 x 316 mm	565 x 93 x 360 mm	595 x 106 x 360 mm	660 x 106 x 360 mm
Net Weight	13.0 kg	21.0 kg	29.0 kg	32.5 kg
Air Inlet	1"	1"	1"	1"
Hose Dia.	19 mm	19 mm	19 mm	19 mm


< SIZE CHART FOR CHISELS >

SHANK

R=Round



H=Hex.



POINT

M= Moil(※Standard)



B= Blank



F= Flat



C= Cutter



TYPE	MODEL NO.	SHANK		POINT				WIDTH W(mm)	L	SIZE(mm)				
										φ 1	φ 2	D	d1	d2
A	NC-0S	R	H	M	B	F	C	40	200	47	30	12.7	20	16
B	NC-1S~NC3S AA-10A~AA-30S	R	H	M	B	F	C	70	250	60	40	17.5	27	20
C	CB-10	R	—	M	—	F	C	75	400	80	—	26	40	28
D	CB-20	R	—	M	—	F	C	75	400	87	—	30	40	30
E	CB-30/CB-35	R	—	M	—	F	C	80	470	87	—	35	45	34



QUICK CHANGE COUPLINGS

IMPACT WRENCH HEXAGON SOCKETS & MINI OILER

< SOCKET >

DSH (for hose)



Type 20 Type 40

CODE	22-DSH	23-DSH	24-DSH	44-DSH	46-DSH	48-DSH
Nominal Size	1/4"	3/8"	1/2"	1/2"	3/4"	1"
Length (mm)	67	71	71	83	92	102
Max. Dia (mm)	26	26	26	36	36	36
Hose ID (mm)	9	11.3	15	15	21	27
Weight (g)	82	85	98	219	244	324

< PLUG >

DPH (for hose)



Type 20 Type 40

CODE	22-DPH	23-DPH	24-DPH	44-DPH	46-DPH	48-DPH
Nominal Size	1/4"	3/8"	1/2"	1/2"	3/4"	1"
Length (mm)	57	61	65	66	77	84
Max. Dia (mm)	16	16	18	22	25	32
Hose ID (mm)	9	11.3	15	15	21	27
Weight (g)	28	32	53	64	106	149

DSM (for piping ; male thread)



Type 20 Type 40

CODE	22-DSM	23-DSM	24-DSM	44-DSM	46-DSM	48-DSM
Nominal Size	R 1/4"	R 3/8"	R 1/2"	R 1/2"	R 3/4"	R 1"
Length (mm)	50	51	51.5	63	67	72
Max. Dia (mm)	26	26	26	36	36	36
Weight (g)	82	90	95	209	234	335

DPM (for piping ; male thread)



Type 20 Type 40

CODE	22-DPM	23-DPM	24-DPM	44-DPM	46-DPM	48-DPM
Nominal Size	R 1/4"	R 3/8"	R 1/2"	R 1/2"	R 3/4"	R 1"
Length (mm)	41	42	42.5	50	55	63
Max. Dia (mm)	14	19	21	22	29	36
Weight (g)	26	39	49	68	103	199

DSF (for piping ; female thread)



Type 20 Type 40

CODE	22-DSF	23-DSF	24-DSF	44-DSF	46-DSF	48-DSF
Nominal Size	Rc 1/4"	Rc 3/8"	Rc 1/2"	Rc 1/2"	Rc 3/4"	Rc 1"
Length (mm)	46	50.5	51	57	61	68
Max. Dia (mm)	26	26	26	36	36	36
Weight (g)	85	97	116	217	231	323

DPF (for piping ; female thread)




Type 20 Type 40

CODE	22-DPF	23-DPF	24-DPF	44-DPF	46-DPF	48-DPF
Nominal Size	Rc 1/4"	Rc 3/8"	Rc 1/2"	Rc 1/2"	Rc 3/4"	Rc 1"
Length (mm)	36	37.5	39	41	45	54
Max. Dia (mm)	17	21	26	27	32	41
Weight (g)	29	40	57	68	97	199

< PAIR SOCKET >



P-1



Model	A	B	C	D	E	W	Weight(g)
P-1	38	53	40	26	7.5	70	277

< FREE PLUG >



FP-2M
FP-3M

Model	T	A	E	F	H	Weight(g)
FP-2M	R 1/4"	63	7.5	7.5	19	59
FP-3M	R 3/8"	64	7.5	8	19	63



FP-2F
FP-3F

Model	T	A	E	H	Weight(g)
FP-2F	Rc 1/4"	64	7.5	19	71
FP-3F	Rc 3/8"	64	7.5	21	72

HEXAGON SOCKETS & ACCESSORIES FOR IMPACT WRENCHES



Size Across Flats mm	1"(25.4mm) Drive Sockets						1-1/2"(38.1mm) Drive Sockets	
	Short Type		For Cars		Long for Bolts		Short Type	
	Item No.	Length mm	Item No.	Length mm	Item No.	Length mm	Item No.	Length mm
17	1/1-WS-17	57			1/1-WAU-17	100		
18	18	57						
19	19	57			19	100		
20	20	57						
21	21	57			21	100		
22	22	57			22	100		
23	23	57			23	100		
24	24	57	1/1-WA-24	72	24	100		
25	25	57						
26	26	57			26	100		
27	27	60	27	72	27	100		
28	28	60	28	72	28	100		
29	29	60			29	100		
30	30	62	30	72	30	100		
32	32	62	32	72	32	100		
33	33	62	33	72	33	100		
34	34	62			34	100		
35	35	62	35	72	35	100		
36	36	62	36	72	36	100		
37	37	68			37	100		
38	38	68	38	72	38	100		
40	40	68			40	100		
41	41	68	41	80	41	100		
42	42	68						
44	44	68			44	100		
46	46	72			46	100	1-1/2WS-46	85
48	48	75			48	100		85
50	50	75			50	100		
51	51	75			51	100		
52	52	80			52	110		
54	54	80			54	110	54	90
55	55	80			55	110	55	90
56	56	80			56	110		
57	57	80			57	110		
58	58	80			58	110	58	95
60	60	80			60	110	60	95
62	62	80						
63	63	80					63	100
65	65	85					65	100
67	67	85					67	100
70	70	90					70	100
71	71	90					71	105
75	75	95					75	105
76	76	95						
77							77	105
80	80	100					80	110
85	85	105					85	115
90	90	110					90	120
95	95	115					95	125
100							100	130
105							105	135
110							110	137
115							115	140
120							120	145

※ Small size (3/8", 1/2" & 3/4") & special sizes are available upon your request.



Cap Nut Sockets for double types

Size Across Flats mm	3/4"(19.0mm) Drive Sockets		1"(25.4mm) Drive Sockets	
	Item No.	Length(mm)	Item No.	Length(mm)
17	3/4WAB-17	67	1/1WAB-17	76
19	19	67	19	76
20	20	67	20	76
20.5			20.5	76
21	21	67	21	76
22			22	76

Extension Bars

Square drive Sq.	Item No.	Male Square	Length L	Weight G
9.5(3/8)	3/8WETB-75	9.5(3/8)	75	85
	100		100	110
12.7(1/2)	1/2WETB-100	12.7(1/2)	100	230
	150		150	330
19.0(3/4)	3/4WETB-100	19.0(3/4)	100	430
	150		150	530
25.4(1 1/16)	1 1/16WETB-160	25.4(1 1/16)	160	1,060
	200		200	1,300

Universal Joints

Item No.	Item No.	Male Square	Length L	Weight G
WUJ-3/8	9.5(3/8)	9.5(3/8)	48.5	190
1/2	12.7(1/2)	12.7(1/2)	68	190
3/4	19.0(3/4)	19.0(3/4)	112	790
1 1/16	25.4(1 1/16)	25.4(1 1/16)	128	1,300

Adapters

Item No.	Item No.	Male Square	Length L	Weight G
WSAD-3/4	9.5(3/8)	12.7(1/2)	34	55
403	12.7(1/2)	9.5(3/8)	36	80
406	12.7(1/2)	19.0(3/4)	47	150
604	19.0(3/4)	12.7(1/2)	50	190
608	19.0(3/4)	25.4(1 1/16)	61	360
806	25.4(1 1/16)	19.0(3/4)	64	430
8084	25.4(1 1/16)	38.1(1 1/2)	81	870
8408	38.1(1 1/2)	25.4(1 1/16)	90	1,300

KPT-02 MINI OILER

—AUTOMATIC LUBRICATION, SIMPLY CONNECTING TO AIR INLET—

1/4" Female →



Net Weight..... 65 g

(10 pcs Blister Pack)



※ One-touch type, European type & Regulators are available upon your request.



KAWASAKI MACHINERY CO., LTD.
YAESU NO.6 NAGAOKA BLDG. 6F, 1-9-8 MINATO
CHUO-KU, TOKYO 104-0043, JAPAN
TEL. +81-3-3555-7941
FAX +81-3-3555-7945
E-MAIL kpt@kawasaki-mac.co.jp
URL www.kawasaki-mac.co.jp/